


COSENTINO®  
**Exelis-C**

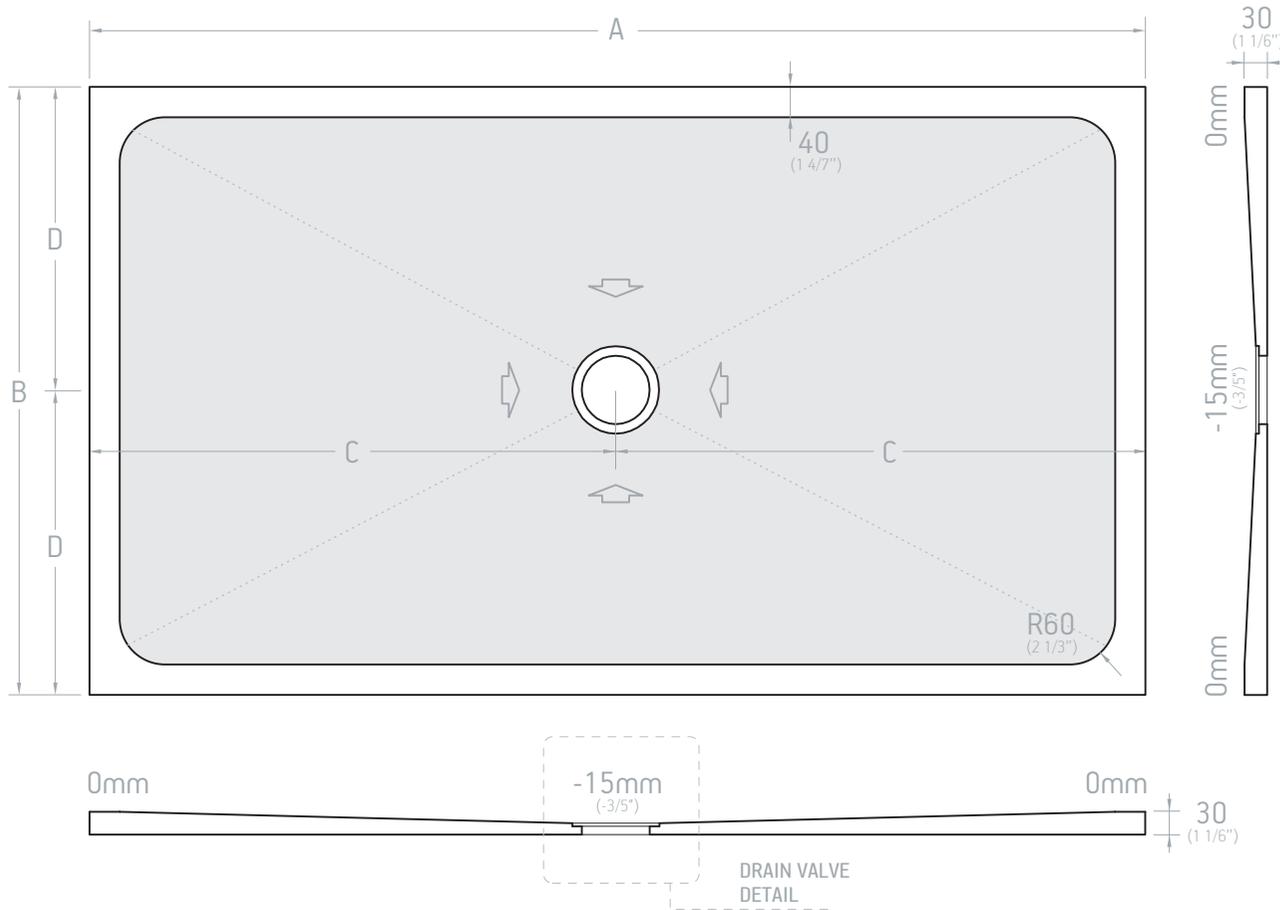

silestone®

Cosentino Center

Quantity (units)

Colour and finish (colorlist)

Polish

Anti-slip treatment:

Full sandblasted

A. Length: min. 800mm (31 1/2"), max. 3000 mm (118")

B. Width: min. 800mm (31 1/2"), max. 1524 mm (60")

C. Drain valve drill position - long side: min. 200mm (8")  
 max. 1500mm (59")

D. Drain valve drill position - short side: min. 200mm (8")  
 max. 1372mm (54")

Comments

EXTRAS:

• Square cut corner, opposite to the drain hole.

Yes = Mark the side, length and width of the cut

• Diagonal cut.

Yes = Mark the side, length and width of the cut

• Square cut corner, drain hole side.

Yes = Mark the side, length and width of the cut

• Shower panel/screen groove.

Yes = Mark side and thick of the shower panel/screen

• PVC tile-flange for vertical cladding.

Yes = Add the flanges using their SKU codes

Yes  No


Yes  No

Yes  No


Yes  No

Yes  No

DRAIN VALVE - USA/CA

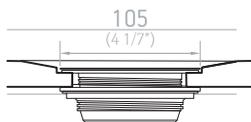

DRAIN HOLE DETAIL - USA/CA

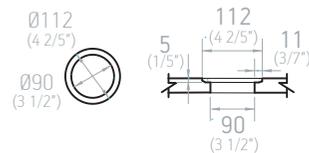

For special drain hole diameters, please contact with Product Department.

Accessories included:

- Drain valve

This shower base must incorporate a continuous PVC flange, raised  $\geq 25.4$  mm (1 in.) above the rim/threshold of the base, along the sides in contact with a vertical surface (wall).

**ATTENTION:** mark these sides in the drawing and add these extra tile-flanges needed to the order.

Reset

REV: 05 01/2024